

# LED Strip Lights



## INTRODUCTION

### Features:

1. Super-bright, Low power consumption of SMD LED
2. Linear separable LED strip light on the flexible PCB with self-adhesive back
3. Energy Saving, Long lifespan of SMD LED (>50, 000hours)
4. Each unit of 3 LEDs can be cut out at regular segments without damaging the rest ribbon.
5. Use ultra-thin and flexible PCB, the thickness for non-waterproof is 2.2mm and thickness for waterproof is 3.4mm

### Applications :

1. Car decoration
2. Architectural decorative lighting
3. Archway, canopy and bridge edge lighting
4. Amusement park
5. Emergency hallway lighting
6. Auditorium walkway lighting
7. Stairway accent lighting
8. Channel letter lighting



GNL-FSP-5050RGB-chase-A

## NAMING RULES

GNL-FSP-5050RGB-chase-A


- Company name:G-NOR(GN)
- Product category:Strip
- LED type
- Color
- chasing strip
- A:Double PCB

## SPECIFICATIONS

Light source parameters	
LED type	SMD 5050
Angle( $\theta$ )	120°
LED Qty	150PCS
Life Span	>50,000 hours
Electrical parameters	
Luminous flux(lm)	510lm/m
Voltage	12VDC
Power	7.2W/m

Appearance parameters	
Size	12mm*5000mm
LED Color	RGB
Fixed way	3M
Environmental parameters	
Working Temperature	-20 C – +50 C
Storage Temperature	-30 C – +60 C
waterproof	NO
Warranty	24Months

## SIZE

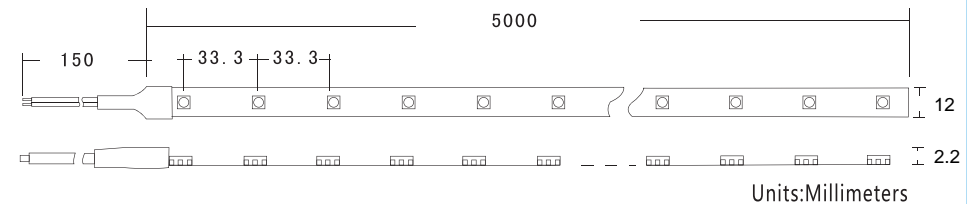

## PACKING INFORMATION



Electrostatic bag size	200*260mm
Outside packing carton	225*265*115mm
Packing Qty	7PCS
Net weight	0.9kg/1Box
Gross weight	1.1kg

CE RoHS

# LED Strip Lights



## INTRODUCTION

### Features:

1. Super-bright, Low power consumption of SMD LED
2. Linear separable LED strip light on the flexible PCB with self-adhesive back
3. Energy Saving, Long lifespan of SMD LED (>50, 000hours)
4. Each unit of 3 LEDs can be cut out at regular segments without damaging the rest ribbon.
5. Use ultra-thin and flexible PCB, the thickness for non-waterproof is 2.2mm and thickness for waterproof is 3.4mm

### Applications :

1. Car decoration
2. Architectural decorative lighting
3. Archway, canopy and bridge edge lighting
4. Amusement park
5. Emergency hallway lighting
6. Auditorium walkway lighting
7. Stairway accent lighting
8. Channel letter lighting



GN - FSP-5050UWC-150--B

## NAMING RULES

GN - FSP-5050UWC-150 - B


- Company name:G-NOR(GN)
- Product category:Strip
- LED type
- Color
- LED Qty
- A:Double PCB / B:Single PCB

## SPECIFICATIONS

Light source parameters	
LED type	SMD 5050
Angle( $\theta$ )	120°
LED Qty	150PCS
Life Span	>50,000 hours
Electrical parameters	
Luminous flux(lm)	510lm/m
Voltage	12VDC
Power	6.4w/m

Appearance parameters	
Size	10mm*5000mm
LED Color	CW/WW/R/G/B/Y
Fixed way	3M
Environmental parameters	
Working Temperature	-20 C – +50 C
Storage Temperature	-30 C – +60 C
waterproof	IP65
Warranty	24Months

## SIZE

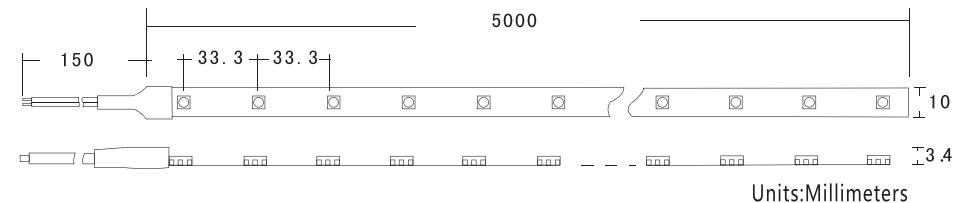

## PACKING INFORMATION



Electrostatic bag size	200*260mm
Outside packing carton	225*265*115mm
Packing Qty	7PCS
Net weight	0.7kg/1Box
Gross weight	0.9kg

CE RoHS