

LED Strip Lights



INTRODUCTION

Features:

1. Super-bright, Low power consumption of SMD LED
2. Linear separable LED strip light on the flexible PCB with self-adhesive back
3. Energy Saving, Long lifespan of SMD LED (>50, 000hours)
4. Each unit of 3 LEDs can be cut out at regular segments without damaging the rest ribbon.
5. Use ultra-thin and flexible PCB, the thickness for non-waterproof is 2.2mm and thickness for waterproof is 3.4mm

Applications :

1. Car decoration
2. Architectural decorative lighting
3. Archway, canopy and bridge edge lighting
4. Amusement park
5. Emergency hallway lighting
6. Auditorium walkway lighting
7. Stairway accent lighting
8. Channel letter lighting



GN - FSP-1210UWC-150--A

NAMING RULES

GN - FSP-1210UWC-150 - A


- Company name:G-NOR(GN)
- Product category:Kicker Light
- LED type
- Color
- LED Qty
- A:Double PCB

SPECIFICATIONS

| Light source parameters | |
|-------------------------|---------------|
| LED type | SMD 1210 |
| Angle(θ) | 120° |
| LED Qty | 150PCS |
| Life Span | >50,000 hours |
| Electrical parameters | |
| Luminous flux(lm) | 160lm/m |
| Voltage | 12VDC |
| Power | 2.2w/m |

| Appearance parameters | |
|--------------------------|---------------|
| Size | 8mm*5000mm |
| LED Color | CW/WW/R/G/B/Y |
| Fixed way | 3M |
| Environmental parameters | |
| Working Temperature | -20 C – +50 C |
| Storage Temperature | -30 C – +60 C |
| waterproof | IP65 |
| Warranty | 24Months |

SIZE

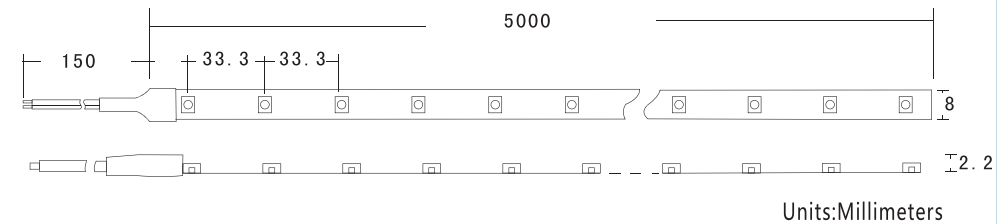

PACKING INFORMATION



| | |
|------------------------|---------------|
| Electrostatic bag size | 200*260mm |
| Outside packing carton | 225*265*115mm |
| Packing Qty | 10PCS |
| Net weight | 0.9kg/1Box |
| Gross weight | 1.1kg |

CE RoHS