


1、Parameter

Part NO.	GNL-AL1420-1210-xx GNL-AL1421-1210-xx	GNL-AL1420-5050-xx GNL-AL1421-5050-xx
LED NO.	60pcs/M 72pcs/M	60pcs/M 72pcs/M
Power	4.8W / 5.8W	14.4W / 17W
Voltage	12VDC	12VDC
Fixture Material	Aluminum	
Packing Dimension	14×20×1000mm	
Lifespan	30,000 to 50,000 hours	
Working conditions	-20℃ - +40℃	
Color Temperature	Gold lighting apply warm white (3000k-3500k) Diamond lighting apply cold white (7500k-8500k)	


2、Data specification

Model NO.	Peak Wavelength (nm)	Model NO.	Peak Wavelength (nm)
GNL-AL1420-1210UWC-60	7500k-8500k	GNL-AL1421-1210UWC-60	7500k-8500k
GNL-AL1420-1210UWC-Y-60	3000k-3500k	GNL-AL1421-1210UWC-Y-60	3000k-3500k
GNL-AL1420-1210UWC-72	7500k-8500k	GNL-AL1421-1210UWC-72	7500k-8500k
GNL-AL1420-1210UWC-Y-72	3000k-3500k	GNL-AL1421-1210UWC-Y-72	3000k-3500k
GNL-AL1420-5050UWC-60	7500k-8500k	GNL-AL1421-5050UWC-60	7500k-8500k
GNL-AL1420-5050UWC-Y-60	3000k-3500k	GNL-AL1421-5050UWC-Y-60	3000k-3500k
GNL-AL1420-5050UWC-72	7500k-8500k	GNL-AL1421-5050UWC-72	7500k-8500k
GNL-AL1420-5050UWC-Y-72	3000k-3500k	GNL-AL1421-5050UWC-Y-72	3000k-3500k

3、Suite drawing


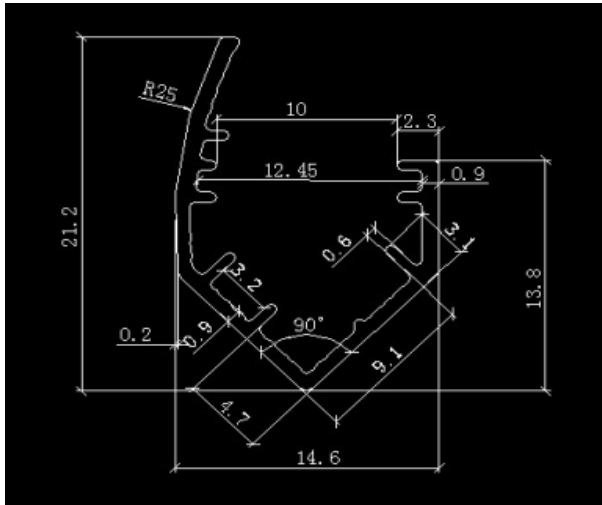


1421

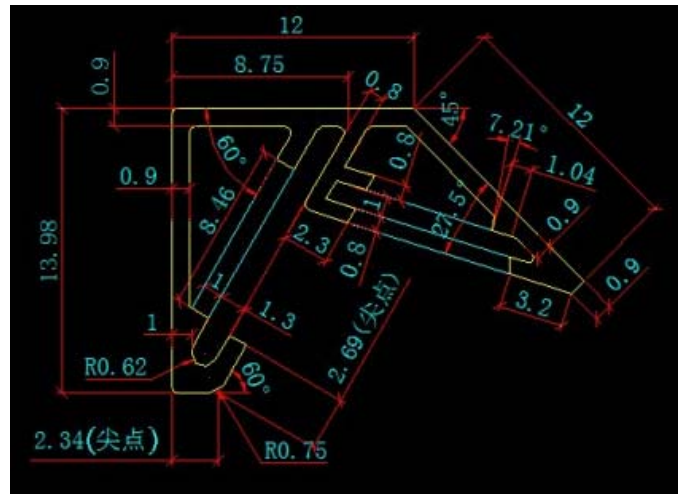

1420

4、Connect

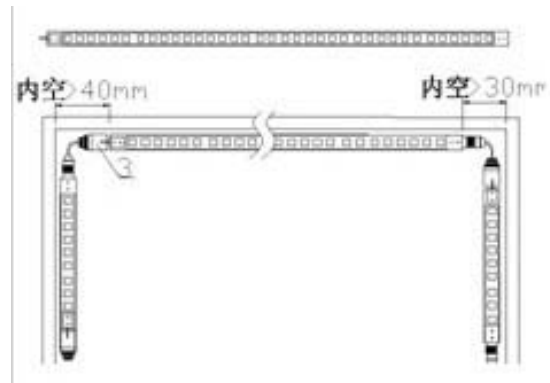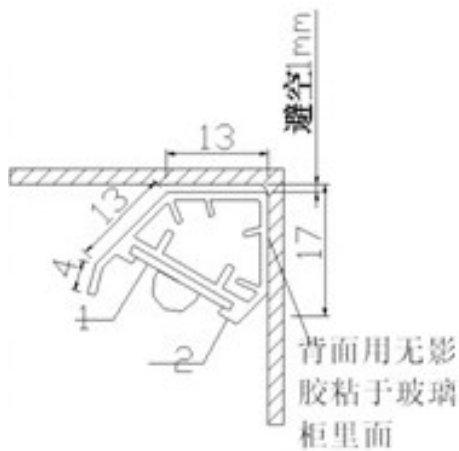

5、cuting



6. Practical application

