



1、 Parameter

Part NO.	LED model	LED NO. (pcs)	Voltage	Power	Lifespan (hours)	Working conditions	Color	Peak Wavelength (nm)	View Angle
GNL-SER-36UEC	1840UEC	36	12VDC	6W	30,000 to 50,000	-20℃to+40℃	RED	625nm	80°
GNL-SER-36UYC	1840UYC	36	12VDC	6W	30,000 to 50,000	-20℃to+40℃	Yellow	590nm	80°
GNL-SER-36UBC	1840UBC	36	12VDC	6W	30,000 to 50,000	-20℃to+40℃	Blue	470nm	70°
GNL-SER-36PGC	1840PGC	36	12VDC	6W	30,000 to 50,000	-20℃to+40℃	Green	520nm	70°
GNL-SER-36UWC	1840UWC	36	12VDC	6W	30,000 to 50,000	-20℃to+40℃	White	5000k-7000k	75°
GNL-SER-36UWC- Y	1840UWC-Y	36	12VDC	6W	30,000 to 50,000	-20℃to+40℃	Warm White		80°
GNL-SER-36RGB	1840UEC 1840UBC 1840PGC	36	12VDC	6W	30,000 to 50,000	-20℃to+40℃	RGB		80°

2、 Dimensions

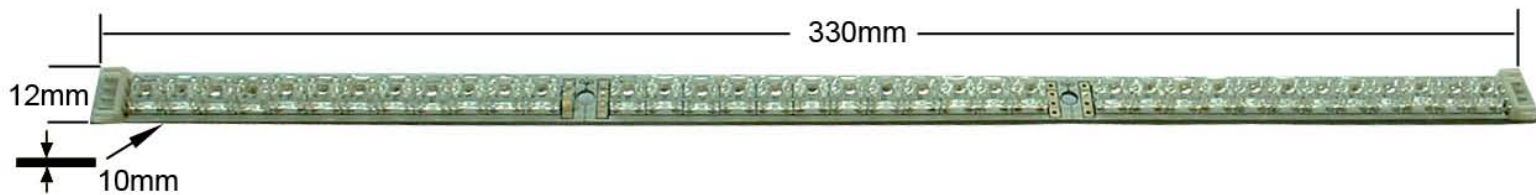

3、 cutting

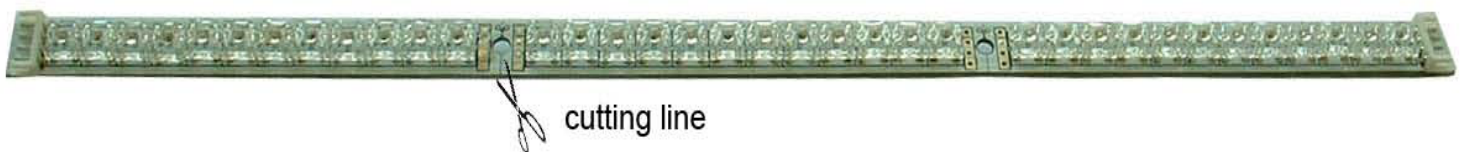

4、 Connect

