


GNL-E14-S608 LED BULB

■ Product Surface Chart



■ Product Framework Dimension Chart

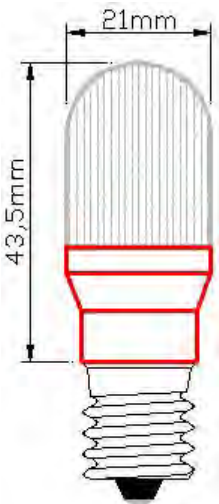

Unit : MM

■ FEATURES:

- Long life LED operating 50,000hrs.
- Easy Installation using Existing socket
- Major Power savings
- Voltage: 220VAC 12V Option
- Choice of 6 colors
- Lamp Base: E14 Base

■ Datasheet

4 LED VERSION

P/N	LED Color	Voltage	Intensity (lm)	Wavelength (nm)	Viewing Angle
GNL-E14-S608-4R	Ultra Red	220VAC/12VDC	6.0	625	270°
GNL-E14-S608-4Y	Ultra Yellow	220VAC/12VDC	6.0	590	270°
GNL-E14-S608-4B	Ultra Blue	220VAC/12VDC	4.8	470	270°
GNL-E14-S608-4G	Ultra Green	220VAC/12VDC	8.8	520	270°
GNL-E14-S608-4WC	Cool White	220VAC/12VDC	8.4	5500k-7000k	270°
GNL-E14-S608-4WW	Warm White	220VAC/12VDC	7.6	2700k-3500k	270°

P/N	LED Color	Voltage	Intensity (lm)	Wavelength (nm)	Viewing Angle
GNL-E14-S608-5R	Ultra Red	220VAC/12VDC	7.5	625	270°
GNL-E14-S608-5Y	Ultra Yellow	220VAC/12VDC	7.5	590	270°
GNL-E14-S608-5B	Ultra Blue	220VAC/12VDC	6.0	470	270°
GNL-E14-S608-5G	Ultra Green	220VAC/12VDC	11.0	520	270°
GNL-E14-S608-5WC	Cool White	220VAC/12VDC	10.5	5500k-7000k	270°
GNL-E14-S608-5WW	Warm White	220VAC/12VDC	9.5	2700k-3500k	270°

PERFORMANCE

