



Users manual for flexible reel strips

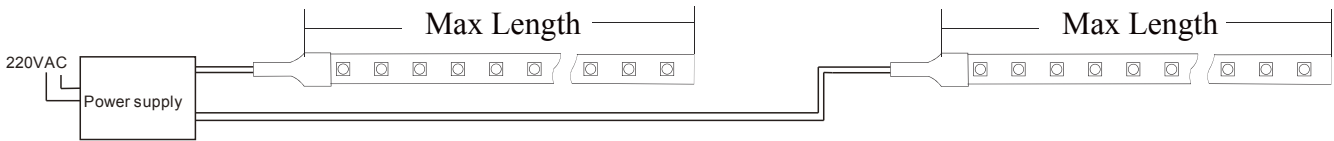

power supply input on one end

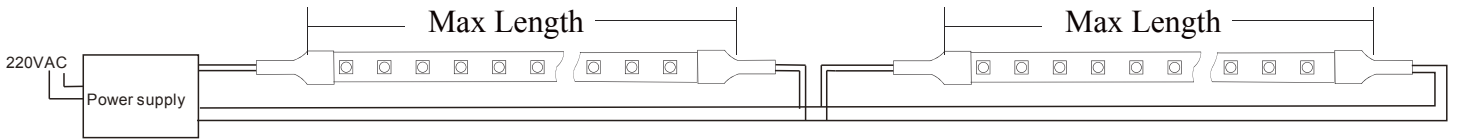

power supply input on both ends

Quantity of strips driven by different connection methods

P\N	power supply input on one end	power supply input on both ends
GN-FSP-1210UWC-150-WP	Max 15M	Max 30M
GN-FSP-1210UWC-150	Max 15M	Max 30M
GN-FSP-1210UWC-300-WP	Max 10M	Max 20M
GN-FSP-1210UWC-300	Max 10M	Max 20M
GN-FSP-1210UWC-600-WP	Max 5M	Max 10M
GN-FSP-1210UWC-600	Max 5M	Max 10M
GN-FSP-5050UWC-150-WP	Max 7M	Max 14M
GN-FSP-5050UWC-150	Max 7M	Max 14M
GN-FSP-5050UWC-300-WP	Max 2.5M	Max 5M
GN-FSP-5050UWC-300	Max 2.5M	Max 5M

Quantity of strips driven by different power supply

Example: power supply input on one end

P\N	12V 5A	12V 10A	12V 15A
GN-FSP-1210UWC-150-WP	Typ 10M*2	Typ 10M*5	Typ 10M*7
GN-FSP-1210UWC-150	Typ 10M*2	Typ 10M*5	Typ 10M*7
GN-FSP-1210UWC-300-WP	Typ 10M*1	Typ 10M*2	Typ 10M*3
GN-FSP-1210UWC-300	Typ 10M*1	Typ 10M*2	Typ 10M*3
GN-FSP-1210UWC-600-WP	Typ 5M*1	Typ 5M*2	Typ 5M*3
GN-FSP-1210UWC-600	Typ 5M*1	Typ 5M*2	Typ 5M*3
GN-FSP-5050UWC-150-WP	Typ 5M*1	Typ 5M*3	Typ 5M*5
GN-FSP-5050UWC-150	Typ 5M*1	Typ 5M*3	Typ 5M*5
GN-FSP-5050UWC-300-WP	Typ 2M*2	Typ 2M*4	Typ 2M*6
GN-FSP-5050UWC-300	Typ 2M*2	Typ 2M*4	Typ 2M*6